



TMSD

Thread Mill for Deep Holes



METRIC

TMSD

Thread Mill for Deep Holes

A multi-flute, high-productivity, and economical solution for milling threads in deep holes



See it in action



Vertical Style (7V, 9V, 11V)



Tool Overhang (L1) 25-45
Cutting Dia. (D2) 10.5-20.0
No. of Flutes (Z) 3



Tool Overhang (L1) max 65
Cutting Dia. (D2) 10.5-20.0
No. of Flutes (Z) 3



American Buttress

For inserts
(5.0L, 3/8"L, 5/8"V)



Pitch Range 16-2.5 tpi

L Style (Mini L) For Small Bores and Short L2



Tool Overhang (L1) 29-42
Cutting Dia. (D2) 13-17.7
No. of Flutes (Z) 1-3



Tool Overhang (L1) max 65
Cutting Dia. (D2) 13-17.7
No. of Flutes (Z) 1-3

A Style For Shorter L2



Tool Overhang (L1) max 144
Cutting Dia. (D2) 26-35.3
No. of Flutes (Z) 3

L Style (3/8" L) For Large Trapezoid Profiles and ABUT



Tool Overhang (L1) 50-105
Cutting Dia. (D2) 21.6-35.5
No. of Flutes (Z) 1-3



Tool Overhang (L1) max 120
Cutting Dia. (D2) 21.6-33.5
No. of Flutes (Z) 1-3



Tool Overhang (L1) max 200
Cutting Dia. (D2) 48-80
No. of Flutes (Z) 5-7

U Style For Large Pitches



Tool Overhang (L1) 40-145
Cutting Dia. (D2) 14.75-42
No. of Flutes (Z) 1-4



Tool Overhang (L1) max 135
Cutting Dia. (D2) 14.75-31.0
No. of Flutes (Z) 1-4







Tool Overhang (L1) max 144
Cutting Dia. (D2) 23.3-36.5
No. of Flutes (Z) 2-4



Tool Overhang (L1) max 200
Cutting Dia. (D2) 42-98
No. of Flutes (Z) 4-7

TMSD CATALOG

■ Vardex Ordering Code System	Page 4
INSERTS (Vertical Style) 	
■ Partial Profile 60°	Page 5
■ Partial Profile 55°	Page 6
■ Trapez	Page 7
■ Stub ACME	Page 7
TOOLHOLDERS (Vertical Style)	
■ Weldon Shank L Style 	Page 8
■ Carbide Cylindrical Shank 	Page 9
INSERTS (U, A, L, V Styles)	
■ Partial Profile 60°	Page 10
■ Partial Profile 55°	Page 11
■ Trapez	Page 12
■ ACME	Page 13
■ Stub ACME	Page 13
■ American Buttress 	Page 14
TOOLHOLDERS (U, A, L, V Styles)	
■ Weldon Shank L Style (Mini L)	Page 15
■ Carbide Cylindrical Shank L Style (Mini L)	Page 16
■ Weldon Shank L Style (3/8" L)	Page 17
■ Carbide Cylindrical Shank L Style (3/8" L)	Page 18
■ Shell Mill L Style (3/8" L)	Page 19
■ Shell Mill V Style (5/8" V)	Page 20
■ Weldon Shank U Style	Page 21
■ Carbide Cylindrical Shank U Style	Page 22
■ Steel Cylindrical Shank U Style	Page 23
■ Shell Mill U Style	Page 24
■ Steel Cylindrical Shank A Style	Page 25
TECHNICAL DATA	
■ Recommended Grades, Cutting Speeds and Feed	Page 26

TMSD Line System Advantages

Smooth Cut

- Reduced load on cutting edges due to single point insert design

Wide Range of Profiles

- Partial profile for: ISO, UN, W
- Semi Partial profile for: TR, ACME, Stub ACME
- Full profile: American Buttress

Cost Effective

- Up to 3 cutting edges per insert
- Very high feed per tooth

Fast Machining

- Multi-flute, up to 7 cutting edges (inserts)

Long Overhang

- Up to 144mm (200mm in Shell Mill)

Coolant Thru

- For improved chip evacuation and cooling at the cutting corner

New Vertical Inserts

- Reinforced Cutting Corner Support

Smaller Tool Cutting Diameter with 3 Flutes

- As small as 10.5mm

**VARGUS
GEN**






Tool Selection and
CNC Program Generator
www.vargus.com



Vardex Ordering Code System

TMSD Inserts

2	U	I	DB	60	TM	VBX
1	2	3	4	5	6	7

1 - Insert Size 5 - IC5.0 mm 2 - IC1/4" 3 - IC3/8" 4 - IC1/2" 5 - IC5/8" 7 - IC6.8 mm 9 - IC8.5 mm 11 - IC10.7 mm 	2 - Insert Style U -  A -  L -  V - Vertical Style 7, 9, 11 V - V Style 5/8" 	3 - Type of Insert I - Internal	4 - Pitch Full Profile - Pitch Range <table border="1"> <tr> <td>mm</td> <td>tpi</td> </tr> <tr> <td>2.0-8.0</td> <td>16-2.5</td> </tr> </table> Partial Profile - U, A, L Styles <table border="1"> <thead> <tr> <th></th> <th>mm</th> <th>tpi</th> <th></th> <th>mm</th> <th>tpi</th> </tr> </thead> <tbody> <tr><td>DA</td><td>0.5-1.5</td><td>48-16</td><td>VA</td><td>0.5-1.0</td><td>28-27</td></tr> <tr><td>DB</td><td>1.5-2.0</td><td>16-12</td><td>VB</td><td>-</td><td>11-9</td></tr> <tr><td>DC</td><td>2.5-4.0</td><td>10-6</td><td>VC</td><td>-</td><td>16-10</td></tr> <tr><td>DD</td><td>2.0-2.5</td><td>9-12</td><td>VD</td><td>1.0-2.0</td><td>24-12</td></tr> <tr><td>DE</td><td>2.5-3.5</td><td>10-7</td><td>VE</td><td>2.0-3.0</td><td>12-8</td></tr> <tr><td>DH</td><td>4.0-6.0</td><td>6-4</td><td>VF</td><td>1.0-1.5</td><td>24-16</td></tr> <tr><td>DK</td><td>6.0-8.0</td><td>4-3</td><td>VG</td><td>1.5-2</td><td>16-12</td></tr> <tr><td>DL</td><td>-</td><td>11-7</td><td>VH</td><td>-</td><td>16-14</td></tr> <tr><td>DM</td><td>2.5</td><td>10</td><td>VK</td><td>2.0-2.5</td><td>12-10</td></tr> <tr><td>DN</td><td>1.0-2.0</td><td>24-11</td><td>VJ</td><td>-</td><td>26-19</td></tr> <tr><td>DP</td><td>1.5-3.0</td><td>16-8</td><td>VM</td><td>-</td><td>8-7</td></tr> <tr><td>DR</td><td>-</td><td>26-14</td><td></td><td></td><td></td></tr> <tr><td>DT</td><td>2.0-4.0</td><td>12-6</td><td></td><td></td><td></td></tr> </tbody> </table>	mm	tpi	2.0-8.0	16-2.5		mm	tpi		mm	tpi	DA	0.5-1.5	48-16	VA	0.5-1.0	28-27	DB	1.5-2.0	16-12	VB	-	11-9	DC	2.5-4.0	10-6	VC	-	16-10	DD	2.0-2.5	9-12	VD	1.0-2.0	24-12	DE	2.5-3.5	10-7	VE	2.0-3.0	12-8	DH	4.0-6.0	6-4	VF	1.0-1.5	24-16	DK	6.0-8.0	4-3	VG	1.5-2	16-12	DL	-	11-7	VH	-	16-14	DM	2.5	10	VK	2.0-2.5	12-10	DN	1.0-2.0	24-11	VJ	-	26-19	DP	1.5-3.0	16-8	VM	-	8-7	DR	-	26-14				DT	2.0-4.0	12-6				5 - Standard 60° - Partial Profile 60° 55° - Partial Profile 55° TR - Trapez DIN 103 ACME - ACME Stub ACME - Stub ACME ABUT - American Buttress
mm	tpi																																																																																											
2.0-8.0	16-2.5																																																																																											
	mm	tpi		mm	tpi																																																																																							
DA	0.5-1.5	48-16	VA	0.5-1.0	28-27																																																																																							
DB	1.5-2.0	16-12	VB	-	11-9																																																																																							
DC	2.5-4.0	10-6	VC	-	16-10																																																																																							
DD	2.0-2.5	9-12	VD	1.0-2.0	24-12																																																																																							
DE	2.5-3.5	10-7	VE	2.0-3.0	12-8																																																																																							
DH	4.0-6.0	6-4	VF	1.0-1.5	24-16																																																																																							
DK	6.0-8.0	4-3	VG	1.5-2	16-12																																																																																							
DL	-	11-7	VH	-	16-14																																																																																							
DM	2.5	10	VK	2.0-2.5	12-10																																																																																							
DN	1.0-2.0	24-11	VJ	-	26-19																																																																																							
DP	1.5-3.0	16-8	VM	-	8-7																																																																																							
DR	-	26-14																																																																																										
DT	2.0-4.0	12-6																																																																																										
			6 - System TM - TMSD (U, A, L Styles) TM3 - TMSD Vertical																																																																																									
			7 - Carbide Grade VBX, VTX																																																																																									

TMSD Toolholders (U, A, L Styles)

C	TM	2	S	C	14	C	17	-	65	-	2	U
1	2	3	4	5	6	7	8		9		10	11
1 - Shank Style None - Steel C - Carbide Shank	2 - System TM	3 - No. of Flutes 1- 4	4 - Insert Type S - Single Point	5 - Cooling C - Coolant	6 - Shank Dia. 9.5 - 40	7 - Shank Type W - Weldon C - Cylindrical	8 - Cutting Dia. 13 - 42					
9 - Max. Tool Overhang 29 - 144	10 - Insert Size 5 - IC5.0 mm 2 - IC1/4" 3 - IC3/8" 4 - IC1/2"	11 - Insert Style U A L	12 - Tool Application ABUT - For American Buttress									

TMSD Toolholders (Vertical Style)

C	GM	C	9	C	13	-	45	-	7	-	3	
1	2	3	4	5	6		7		8		9	
1 - Holder Type None - Steel Shank C - Carbide Shank	2 - System GM- Groove Milling and Thread Milling	3 - Cooling C - Coolant	4 - Shank Dia. 8, 9, 11.5, 12, 14, 15, 20, 25	5 - Shank Style C - Cylindrical W - Weldon	6 - Cutting Dia. 10.5-22.0	7 - Tool Overhang 25-65	8 - Insert Size 7 - IC6.8 mm 9 - IC8.5 mm 11 - IC10.7 mm					
9 - Number of Flutes 3												



TMSD Shell Mill (U, L, V Styles)

TM	4	S	C	D42	-	16	-	3	U	
1	2	3	4	5		6		7	8	
1 - System TM	2 - No. of Flutes 4-7	3 - Insert Type S - Single Point	4 - Cooling C - Coolant	5 - Cutting Dia. 42 - 98	6 - Drive Hole Dia. 16, 22, 27, 32	7 - Insert Size 3 - IC3/8" 4 - IC1/2" 5 - IC5/8"	8 - Insert Style U, L, V			
9 - Tool Application ABUT - For ABUT Inserts										

Partial Profile 60°




Internal



Vertical Style

Insert Style	Pitch		Ordering Code	Dimensions (mm)			Application (Min. Thread Size)					Toolholder
	IC	mm		tpi	Internal	D2	T	L2	ISO Coarse	ISO Fine	UNC	
7V	0.5-1.0	28-27	7VIVA60 TM3 ...	10.5		0.6	-	M11.5x0.5; M11.5x0.75; M12x1.0	-	1/2-28UNEF; 1/2-27UNS		
	1.0-1.5	24-16	7VIVF60 TM3 ...	11.1	2.9	0.8	-	M12.5x1; M13x1.5	-	1/2-24UNS; 1/2-20UNF; 5/16-18UNF; 5/16-16UN		CGMC 8C13-40-7-3 CGMC 9C13-45-7-3 GMC 20W13-25-7-3
	1.5-2.0	16-12	7VIVG60 TM3 ...	11.8		1.0	M14x2.0	M14x1.5	-	5/16-16UN; 5/16-14UNS; 5/16-12UN		
9V	0.5-1.0	28-27	9VIVA60 TM3 ...	13.1		0.6	-	M14x0.5; M14x0.75; M15x1	-	5/16-28UN; 5/16-27UNS		
	1.0-1.5	24-16	9VIVF60 TM3 ...	13.7	4.2	0.8	-	M15x1; M15.5x1.5	-	5/16-24UNEF; 5/16-20UN; 5/16-18UNF; 5/16-16UN		CGMC 11.5C17-50-9-3 CGMC 12C17-50-9-3 GMC 20W17-30-9-3
	1.5-2.0	16-12	9VIVG60 TM3 ...	14.4		1.0	-	M16.5x1.5; M17x2	-	11/16-16UN; 3/4-14UNS; 11/16-12UN		
11V	2.0-2.5	12-10	9VIVK60 TM3 ...	15.1		1.4	-	M17.5x2; M18x2.5	3/4-10	11/16-12UN;		
	1.0-2.0	24-12	11VIVD60 TM3 ...	17.9	5.5	1.0	-	M19x1, M19.5x1.25; M19.5x1.5; M20x1.75; M20x2	-	3/4-24UNS; 13/16-20UNEF; 7/8-18UNS; 13/16-16UN; 7/8-14UNF; 13/16-12UN		CGMC 14C22-60-11-3 CGMC 15C22-65-11-3 GMC 25W22-45-11-3
	2.0-3.0	12-8	11VIVE60 TM3 ...	19.5		1.5	M22x2.5 M24x3	M23x2	1-8	7/8-10UNS; 7/8-12UN		





Vertical Style

Partial Profile 55°




Internal



Vertical Style



Insert Style	Ordering Code	Dimensions (mm)					Application (Min. Thread Size)		Toolholder	
		IC	tpi	Internal	D2	T	L2	r		BSP (G)
7V	26-19	7VIVJ55 TM3 ...	11.35	2.9	0.8	0.07		1/4-19; 3/8-19	-	CGMC 8C13-40-7-3 CCGMC 9C13-45-7-3
	16-14	7VIVH55 TM3 ...	12.0		1.0	0.13		1/2-14; 5/8-14; 3/4-14; 7/8-14;	5/16-16; 5/8-14	GMC 20W13-25-7-3
9V	26-19	9VIVJ55 TM3 ...	13.35	4.2	0.8	0.09		3/8-19	5/8-26; 3/8-16	CGMC 11.5C17-50-9-3 CGMC 12C17-50-9-3
	16-10	9VIVC55 TM3 ...	15.4		1.2	0.15		1/2-14	3/4-16; 1/16-14; 3/4-12; 7/8-11; 3/4-10	GMC 20W17-30-9-3
11V	16-12	11VIVG55 TM3 ...	17.8	5.5	0.9	0.16		1/2-14	13/16-16; 15/16-12	CGMC 14C22-60-11-3 CGMC 15C22-65-11-3 GMC 25W22-45-11-3
	11-9	11VIVB55 TM3 ...	19.1		1.3	0.21		1-11	7/8-11; 1-10; 1 1/8-9	
	8-7	11VIVM55 TM3 ...	19.6		1.5	0.36		-	1-8; 1 1/8-7;	




Vertical Style


Trapez



Internal



Defined by: DIN 103
Tolerance class: 7e/7H



Vertical Style




Insert Style		Ordering Code		Dimensions (mm)			Application (Min. Thread Size)	
IC	mm	Internal	D2	T	L2	Trapez	Toolholder	
7V	2.0	7VI2TR-1 TM3 ...	12.3	2.9	1.3	TR16x2	CGMC 8C13-40-7-3 CGMC 9C13-45-7-3 GMC 20W13-25-7-3	
		7VI2TR-2 TM3 ...				TR18x2		
		7VI2TR-3 TM3 ...				TR20x2		
9V	3.0	9VI3TR-1 TM3 ...	15.4	4.2	1.95	TR22x3	CGMC 11.5C17-50-9-3 CGMC 12C17-50-9-3 GMC 20W17-30-9-3	
		9VI3TR-2 TM3 ...				TR24x3		


Stub ACME



Internal



Defined by: ANSI B1.8: 1988
Tolerance class: 2G




Vertical Style



Insert Style		Ordering Code		Dimensions (mm)			Application (Min. Thread Size)	
IC	tpi	Internal	D2	T	L2	Stub ACME	Toolholder	
7V	8	7VI8STACME TM3 ...	12.3	2.9	1.3	3/8-8	CGMC 8C13-40-7-3 CGMC 9C13-45-7-3 GMC 20W13-25-7-3	
	6	7VI6STACME-1 TM3 ...	12.7			3/4-6		
		7VI6STACME-2 TM3 ...				7/8-6		
9V	5	9VI5STACME-1 TM3 ...	16.7	4.2	1.95	1-5	CGMC 11.5C17-50-9-3 CGMC 12C17-50-9-3 GMC 20W17-30-9-3	
		9VI5STACME-2 TM3 ...				1 1/8-5		
		9VI5STACME-3 TM3 ...				1 1/4-5		
11V	4	11VI4STACME-1 TM3 ...	20.8	5.5	2.6	1 3/8-4	CGMC 14C22-60-11-3 CGMC 15C22-65-11-3 GMC 25W22-45-11-3	
		11VI4STACME-2 TM3 ...				1 1/2-4		
		11VI4STACME-3 TM3 ...				1 3/4-4		
		11VI4STACME-4 TM3 ...				2-4		





Vertical Toolholders - Weldon Shank

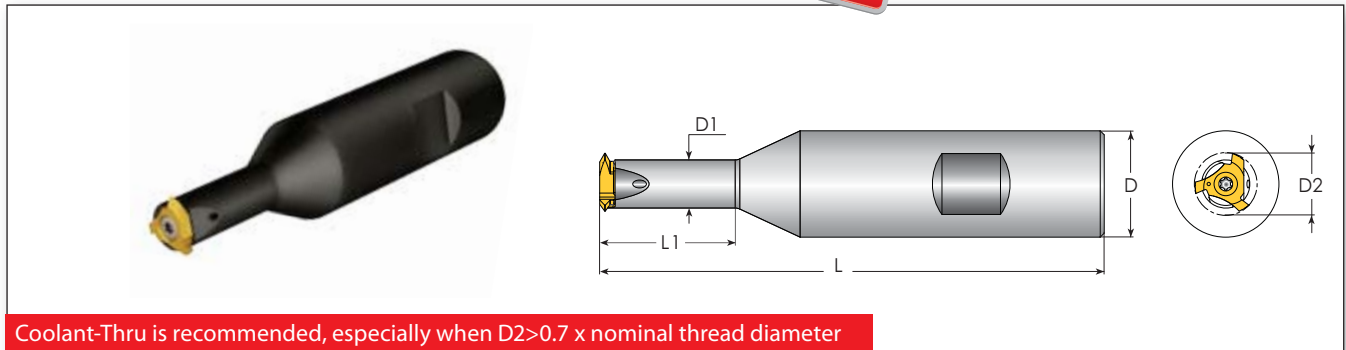

Insert Style	Ordering Code	Dimensions mm					Spare Parts			
		L	L1	D	D1	D2*	Insert Screw	Torx Key	Blade	Handle
7V	GMC 20W13-25-7-3	95	25	20	9	10.5-12.7	SN2T8-M1 (M3.0x0.5x9)	K2T	-	-
9V	GMC 20W17-30-9-3	105	30	20	11.5	13.1-16.7	SN3T15-M2 (M4x0.7x13.5)	-	Blade T15-1/4	Smart Handle 1/4x2
11V	GMC 25W22-45-11-3	115	45	25	15	17.8-20.8	SN4T20-M3 (M5x0.8x15.5)	-	Blade T20-1/4	Smart Handle 1/4x2


* The tool cutting diameter (D2) is defined by the insert (See pages 5-7)

For Correct Clamping:




Always mount insert with the identification mark between the two curved surfaces on the toolholder

Vertical Toolholders - Carbide Cylindrical Shank

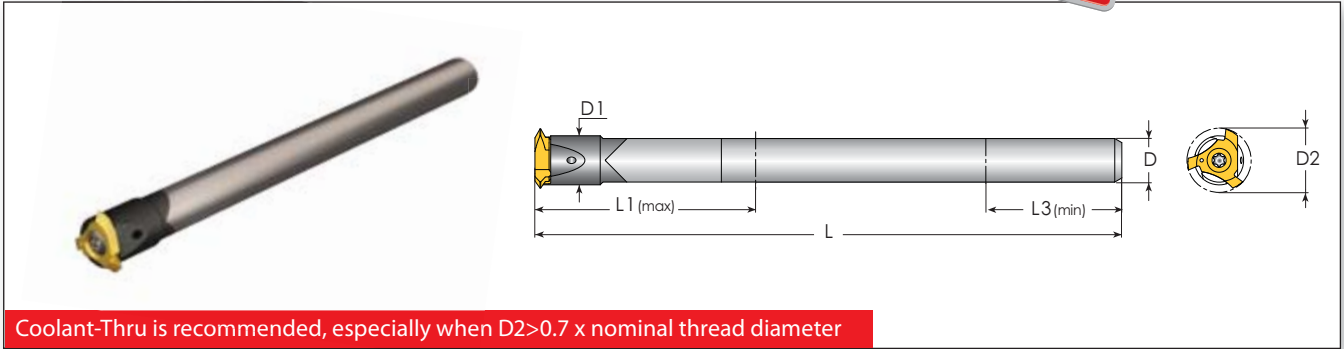

Coolant-Thru is recommended, especially when $D2 > 0.7 \times$ nominal thread diameter




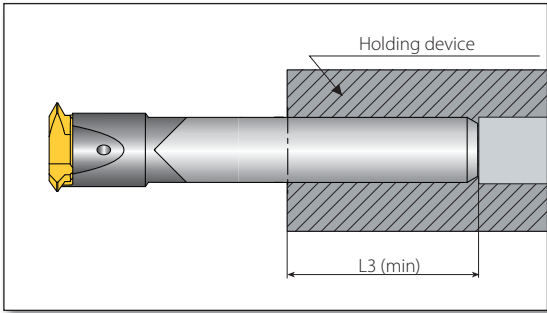


Spare Parts

Insert Style	Ordering Code	Dimensions mm						Spare Parts			
		L	L1	L3 (min)	D	D1	D2*	Insert Screw	Torx Key	Blade	Handle
7V	CGMC 8C13-40-7-3	115	40	18	8	9	10.5-12.7	SN2T8-M1 (M3.0x0.5x9)	K2T	-	-
	CGMC 9C13-45-7-3		45	20	9						
9V	CGMC 11.5C17-50-9-3	125	50	25	11.5	11.5	13.1-16.7	SN3T15-M2 (M4x0.7x13.5)	-	Blade T15-1/4	Smart Handle 1/4x2
	CGMC 12C17-50-9-3		50	26	12						
11V	CGMC 14C22-60-11-3	135	60	30	14	15	17.8-20.8	SN4T20-M3 (M5x0.8x15.5)	-	Blade T20-1/4	Smart Handle 1/4x2
	CGMC 15C22-65-11-3		65	32	15						

* The tool cutting diameter (D2) is defined by the insert (See pages 5-7)



For Correct Clamping:




Always mount insert with the identification mark between the two curved surfaces on the toolholder

Partial Profile 60°


Internal




Mini L Style



U Style



2UIDM60 TM...
2UIDD60 TM...



A Style

L Style



Insert Size		Pitch		Ordering Code	Dimensions (mm)	
IC	L mm	mm	tpi	Internal	r *	Toolholder
5.0L (Mini L)		0.5-1.5	48-16	5LIDA60 TM...	0.04	TM.SC...5L
		1.0-2.0	24-11	5LIDN60 TM...	0.06	CTM.SC...5L

U Style



2UIDM60 TM...
2UIDD60 TM...




Insert Size		Pitch		Ordering Code	Dimensions (mm)	
IC	L mm	mm	tpi	Internal	r *	Toolholder
1/4"U	11	0.5-1.5	48-16	2UIDA60 TM...	0.05	TM.SC...2U
		1.5-2.0	16-12	2UIDB60 TM...	0.06	CTM.SC...2U
		2.0-2.5	9-12	2UIDD60 TM...		
		2.5	10	2UIDM60 TM...	0.11	CTM2SC 14C17-65-2U
		2.5-4.0	10-6	2UIDC60 TM...	0.14	TM.SC...2U CTM.SC...2U
3/8"U	16	1.5-2.0	16-12	3UIDB60 TM...	0.06	
		2.5-3.5	10-7	3UIDE60 TM...	0.14	TM.SC...3U
		4.0-6.0	6-4	3UIDH60 TM...	0.25	
1/2"U	22	6.0-8.0	4-3	4UIDK60 TM...	0.30	TM.SC D..4U

A Style




Insert Size		Pitch		Ordering Code	Dimensions (mm)	
IC	L mm	mm	tpi	Internal	r *	Toolholder
1/4"A	11	1.5-3.0	16-8	2AIDP60 TM...	0.06	TM.SC...2A
3/8"A	16	2.0-4.0	12-6	3AIDT60 TM...	0.08	TM.SC...3A


* The indicated radius (r) refers to the insert nose radius only



U Style
For Large Pitches




A Style
For Shorter L2



Mini-L Style
For Small Bores and Short L2

Partial Profile 55°

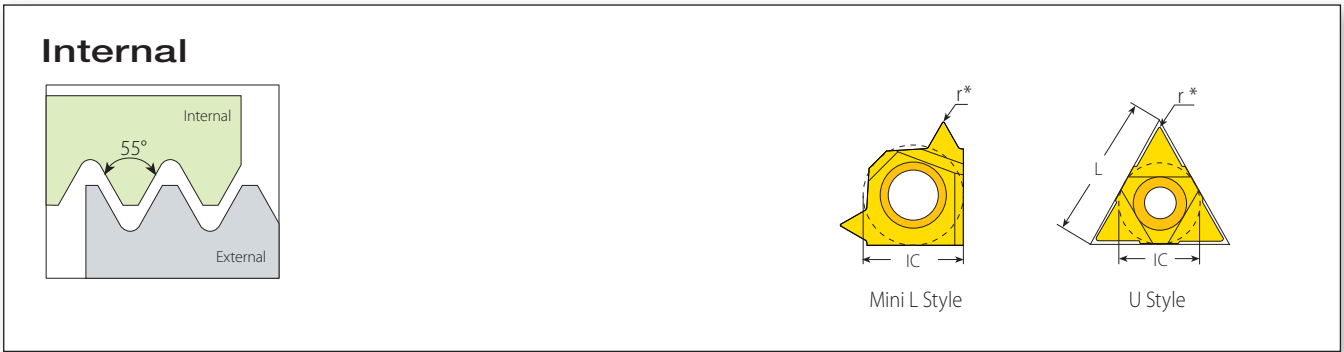

L Style




Insert Size	Pitch	Ordering Code	Dimensions (mm)	Toolholder
IC	tpi	Internal	r*	
5.0L (Mini L)	26-14	5LIDR55 TM...	0.10	TM.SC...5L CTM. SC...5L

U Style




Insert Size		Pitch	Ordering Code	Dimensions (mm)	Toolholder
IC	L mm	tpi	Internal	r*	
1/4"U	11	48-16	2UIDA55 TM...	0.11	TM.SC...2U CTM. SC...2U
		16-12	2UIDB55 TM...	0.08	
		11-7	2UIDL55 TM...	0.24	
3/8"U	16	16-12	3UIDB55 TM...	0.08	TM.SC...3U
		11-7	3UIDL55 TM...	0.24	
1/2"U	22	4-3	4UIDK55 TM...	0.50	TM.SC D..4U

* The indicated radius (r) refers to the insert nose radius only




U Style
For Large Pitches




Mini-L Style
For Small Bores and Short L2

Trapez


Internal




Defined by: DIN 103
Tolerance class: 7e/7H



3/8" L



Mini L Style



U Style

L Style



Insert Size	Pitch	Ordering Code		Application	Toolholder
		IC	mm		
5.0L (Mini L)	2.0		5LI2.0TR-1 TM...	TR16x2, TR20x2	TM.SC...5L CTM.SC...5L
	2.0		5LI2.0TR-2 TM...	TR18x2	
3/8"L	6.0		3LI6.0TR-1 TM...	(TR30-36)x6	TM1SC 25W21-50-3L; CTM1SC 1/2"C21-75-3L
	6.0		3LI6.0TR-2 TM...	(TR115-130)x6	TM7SC D80-32-3L
	7.0		3LI7.0TR TM...	(TR38-44)x7	TM2SC 25W28-75-3L; CTM2SC 18C28-100-3L
	8.0		3LI8.0TR-1 TM...	(TR46-52)x8	TM3SC 32W33-90-3L; CTM3SC 20C33-120-3L
	8.0		3LI8.0TR-2 TM...	(TR175-240)x8	TM7SC D80-32-3L


U Style




Insert Size	Pitch		Ordering Code		Application	Toolholder
	IC	L mm	mm	Internal		
1/4"U		11	3.0	2UI3.0TR-1 TM...	(TR22-TR30)x3	See pages 21-22
				2UI3.0TR-2 TM...	(TR32-TR60)x3	
			4.0	2UI4.0TR-1 TM...	(TR20-TR28)x4	
				2UI4.0TR-2 TM...	(TR65-TR110)x4	
			5.0	2UI5.0TR-1 TM...	TR22x5; TR28x5	
				2UI5.0TR-2 TM...	TR24x5; TR26x5	

American ACME

Internal



Defined by: ANSI B1.5: 1988
Tolerance class: 3G




L Style




Insert Size	Pitch	Ordering Code	Application	
IC	tpi	Internal	Internal	Toolholder
3/8" L	5	3LI5ACME TM...	1¼-5ACME	
		3LI4ACME-1 TM...	1⅜-4ACME	TM1SC 25W21-50-3L; CTM1SC ½"C21-75-3L
		3LI4ACME-2 TM...	1½-4ACME	
	4	3LI4ACME-3 TM...	1¾-4ACME	TM2SC 25W28-75-3L; CTM2SC 18C28-100-3L
		3LI4ACME-4 TM...	2-4ACME	
		3LI3ACME-1 TM...	2¼-3ACME	TM3SC 32W33-90-3L; CTM3SC 20C33-120-3L
	3	3LI3ACME-2 TM...	2½-3ACME	
		3LI3ACME-3 TM...	2¾-3ACME	

Stub ACME

Internal



Defined by: ANSI B1.8: 1988
Tolerance class: 2G



L Style




Insert Size	Pitch	Ordering Code	Application	
IC	tpi	Internal	Internal	Toolholder
3/8" L	5	3LI5STACME TM...	1¼-5STACME	
		3LI4STACME-1 TM...	1⅜-4STACME	TM1SC 25W21-50-3L; CTM1SC ½"C21-75-3L
		3LI4STACME-2 TM...	1½-4STACME	
	4	3LI4STACME-3 TM...	2-4STACME	
		3LI3STACME-1 TM...	2¼-3STACME	TM3SC 32W33-90-3L; CTM3SC 20C33-120-3L
		3LI3STACME-2 TM...	2½-3STACME	
	3	3LI3STACME-3 TM...	2¾-3STACME	




American Buttress



Internal



Defined by: ANSI B1.9.1973
Tolerance class: Class 2



L Style


	Insert Size		Pitch		Ordering Code		Application	
	IC	tpi	Internal	T	Internal	Toolholder		
	5.0L (Mini L)	16	5LI16ABUT TM ...	6	0.875"-4.0" ABUT	TM2SC 16W14-35-5L-ABUT CTM2SC 10C14-50-5L-ABUT		
					1.25"-4.0" ABUT	TM3SC 20W18-45-5L-ABUT CTM3SC 14C18-65-5L-ABUT		
			12	5LI12ABUT TM ...	6	0.875"-6.0" ABUT	TM2SC 16W14-35-5L-ABUT CTM2SC 10C14-50-5L-ABUT	
						1.25"-6.0" ABUT	TM3SC 20W18-45-5L-ABUT CTM3SC 14C18-65-5L-ABUT	
		10	5LI10ABUT TM ...	6	0.875"-16.0" ABUT	TM2SC 16W14-35-5L-ABUT CTM2SC 10C14-50-5L-ABUT		
					1.25"-16.0" ABUT	TM3SC 20W18-45-5L-ABUT CTM3SC 14C18-65-5L-ABUT		
			16	3LI16ABUT TM ...	6	1.75"-4.0" ABUT	TM2SC 25W26-80-3L-ABUT CTM2SC 20C26-105-3L-ABUT	
						2.5"-4.0" ABUT	TM3SC 32W35-105-3L-ABUT	
12	3LI12ABUT TM ...	6	1.75"-6.0" ABUT	TM2SC 25W26-80-3L-ABUT CTM2SC 20C26-105-3L-ABUT				
			2.5"-6.0" ABUT	TM3SC 32W35-105-3L-ABUT				
			3.0"-6.0" ABUT	TM5SC D48-22-3L-ABUT				
			4.0"-6.0" ABUT	TM6SC D58-27-3L-ABUT				
	3/8"L	10	3LI10ABUT TM ...	6	1.75"-6.0" ABUT	TM2SC 25W26-80-3L-ABUT CTM2SC 20C26-105-3L-ABUT		
					2.5"-6.0" ABUT	TM3SC 32W35-105-3L-ABUT		
					3.0"-6.0" ABUT	TM5SC D48-22-3L-ABUT		
					4.0"-6.0" ABUT	TM6SC D58-27-3L-ABUT		
		8	3LI8ABUT TM ...	6	1.75"-6.0" ABUT	TM2SC 25W26-80-3L-ABUT CTM2SC 20C26-105-3L-ABUT		
					2.5"-6.0" ABUT	TM3SC 32W35-105-3L-ABUT		
					3.0"-6.0" ABUT	TM5SC D48-22-3L-ABUT		
					4.0"-6.0" ABUT	TM6SC D58-27-3L-ABUT		
6	3LI6ABUT TM ...	6	1.75"-6.0" ABUT	TM2SC 25W26-80-3L-ABUT CTM2SC 20C26-105-3L-ABUT				
			2.5"-6.0" ABUT	TM3SC 32W35-105-3L-ABUT				
			3.0"-6.0" ABUT	TM5SC D48-22-3L-ABUT				
			4.0"-6.0" ABUT	TM6SC D58-27-3L-ABUT				

V Style





	Insert Size		Pitch		Ordering Code		Application	
	IC	tpi	Internal	T	Internal	Toolholder		
	5/8"V	4	5VI4ABUT TM ...	6	5.5"-24.0" ABUT	TM6SC D88-32-5V6-ABUT		
		3	5VI3ABUT TM ...	8	6.0"-24.0" ABUT	TM6SC D88-32-5V8-ABUT		
		2.5	5VI2.5ABUT TM ...	10	7.0"-24.0" ABUT			

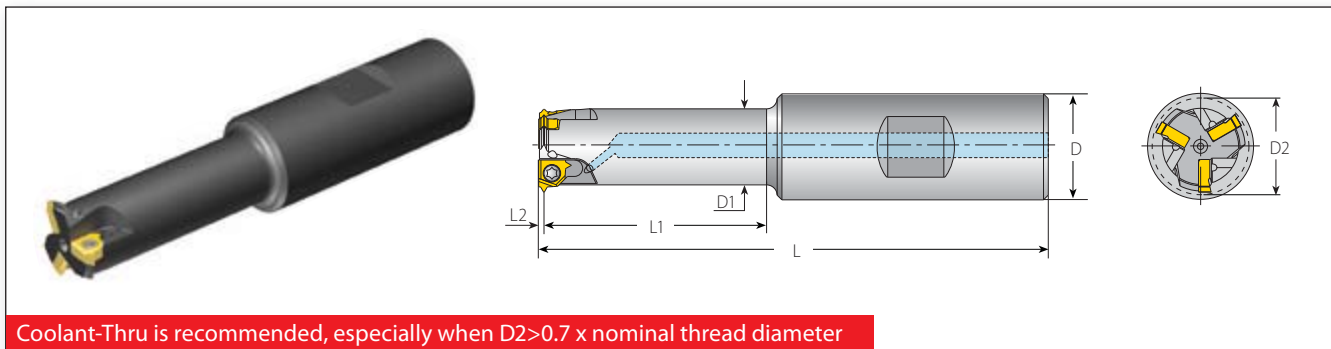Standard Toolholders - Weldon Shank (L Style - Mini L)



Coolant-Thru is recommended, especially when $D2 > 0.7 \times$ nominal thread diameter

Weldon Shank for Mini-L Style Inserts


Weldon Shank for Mini-L Style Inserts									Spare Parts	
Insert Size	Ordering Code	Dimensions (mm)						No. of Flutes		
IC		L	L1	L2	D	D1	D2	Z	Insert Screw	Torx Key
5.0L (Mini L)	TM1SC 16W13-29-5L	81	29		16	9.8	13	1	SN5LTR	K7T
	TM2SC 16W14-33-5L	85	33	1.1	16	10.3	13.5	2		
	TM3SC 20W18-42-5L	96	42		20	14.3	17.7	3		
	NEW TM2SC 16W14-35-5L-ABUT	88	35		16	10.3	14.0	2		
	NEW TM3SC 20W18-45-5L-ABUT	100	45	1.87	20	14.3	18.2	3		

Thread Applications for Mini-L Style Toolholders (Weldon Shank)



Toolholder	Min. Thread Ø								
	D2	ISO Coarse	ISO Fine	UNC	UN/UNF/UNEF/UNS	BSP (G)	Partial 55°	Trapez	
TM1SC 16W13-29-5L	13	M16x2	M14x0.5; M14x0.75; M14.5x1.0; M15x1.5; M17x2.0	5/8-11	5/16-32UN; 5/16-28UN; 5/16-27UNS; 5/16-24UNEF; 5/16-20UN; 5/16-18UNF; 5/16-16UN; 5/16-14UNS; 5/16-12UN	3/8-19	5/16-14	TR16X2; TR18X2	
TM2SC 16W14-33-5L	13.5	M16x2	M15x0.5; M15x0.75; M15x1.0; M16x1.5; M17x2.0	-	5/16-32UN; 5/16-28UN; 5/16-27UNS; 5/16-24UNEF; 5/16-20UN; 5/16-18UNF; 5/16-16UN; 5/16-14UNS; 11/16-12UN	3/8-19	11/16-14	TR16X2; TR18X2	
TM3SC 20W18-42-5L	17.7	-	M19x0.5; M19x0.75; M19x1.0; M20x1.5; M20x2.0	-	3/4-32UN; 3/4-28UN; 7/8-27UNS; 3/4-24UNS; 13/16-20UNEF; 7/8-18UNS; 13/16-16UN; 7/8-14UNF; 13/16-12UN	1/2-14	-	TR20X2	

Toolholder	Thread Ø	
	D2	American Buttress
TM2SC 16W14-35-5L-ABUT	14.0	(0.875"-4")-16; (0.875"-6")-12; (0.875"-16")-10
TM3SC 20W18-45-5L-ABUT	18.2	(1.25"-4")-16; (1.25"-6")-12; (1.25"-16")-10

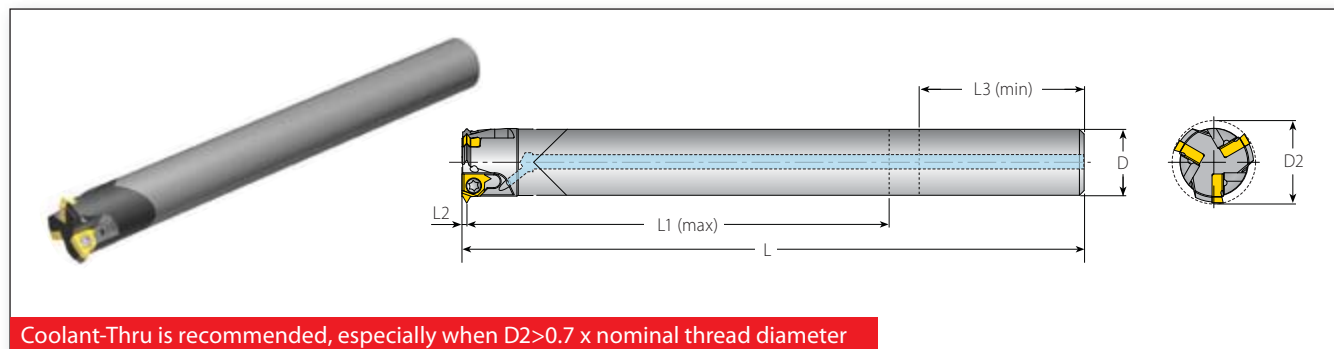Standard Toolholders - Carbide Cylindrical Shank (L Style - Mini L)



Carbide Cylindrical Shank for Mini-L Style Inserts


Carbide Cylindrical Shank for Mini-L Style Inserts									Spare Parts	
Insert Size	Ordering Code	Dimensions (mm)						No. of Flutes		
IC		L	L1 (max)	L2	L3 (min)	D	D2	Z	Insert Screw	Torx Key
5.0L (Mini L)	CTM1SC 09C13-43-5L	109	43	1.1	20	9.5	13	1	SN5LTR	K7T
	CTM2SC 10C14-50-5L	116	50		22	10	13.5	2		
	CTM3SC 14C18-65-5L	132	65	1.87	30	14	17.7	3		
	NEW CTM2SC 10C14-50-5L-ABUT	116	50		22	10	14	2		
	NEW CTM3SC 14C18-65-5L-ABUT	132	65		30	14	18.2	3		

Thread Applications for Mini-L Style Toolholders (Carbide Cylindrical Shank)



Toolholder	Min. Thread Ø								
	D2	ISO Coarse	ISO Fine	UNC	UN/UNF/UNEF/UNS	BSP (G)	Partial 55°	Trapez	
CTM1SC 09C13-43-5L	13	M16x2	M14x0.5; M14x0.75; M14.5x1.0; M15x1.5; M17x2.0	½-11	⅜-32UN; ⅜-28UN; ⅜-27UNS; ⅜-24UNEF; ⅜-20UN; ⅜-18UNF; ⅜-16UN; ⅜-14UNS; ⅜-12UN	⅜-19	⅜-14	TR16X2; TR18X2	
CTM2SC 10C14-50-5L	13.5	M16x2	M15x0.5; M15x0.75; M15x1.0; M16x1.5; M17x2.0	-	⅜-32UN; ⅜-28UN; ⅜-27UNS; ⅜-24UNEF; ⅜-20UN; ⅜-18UNF; ⅜-16UN; ⅜-14UNS; ⅜-12UN	⅜-19	⅜-14	TR16X2; TR18X2	
CTM3SC 14C18-65-5L	17.7	-	M19x0.5; M19x0.75; M19x1.0; M20x1.5; M20x2.0	-	¾-32UN; ¾-28UN; ¾-27UNS; ¾-24UNS; ⅜-20UNEF; ⅜-18UNS; ⅜-16UN; ⅜-14UNF; ⅜-12UN	½-14	-	TR20X2	

Toolholder	Thread Ø	
	D2	American Buttress
CTM2SC 10C14-50-5L-ABUT	14.0	(0.875"-4")-16; (0.875"-6")-12; (0.875"-16")-10
CTM3SC 14C18-65-5L-ABUT	18.2	(1.25"-4")-16; (1.25"-6")-12; (1.25"-16")-10

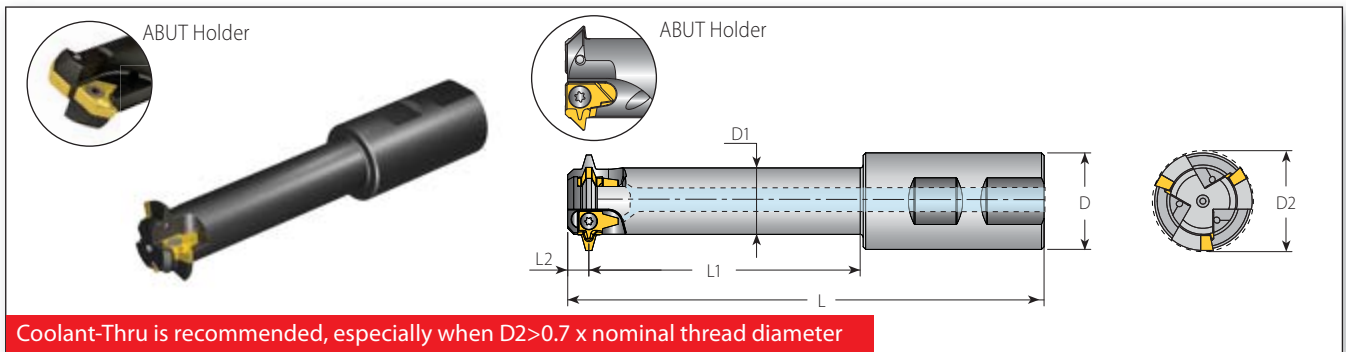Standard Toolholders - Weldon Shank (L Style - 3/8" L)



Weldon Shank for 3/8" L Style Inserts


Weldon Shank for 3/8" L Style Inserts									Spare Parts	
Insert Size	Ordering Code	Dimensions (mm)						No. of Flutes		
IC	Toolholder	L	L1	L2	D	D1	D2	Z	Insert Screw	Torx Key
3/8"L	TM1SC 25W21-50-3L	115	50		25	12.7	21.6	1	SN3T	HK3T
	TM2SC 25W28-70-3L	135	70	7.0	25	18.1	28.5	2	SA3T	
	TM3SC 32W33-90-3L	158	90		32	22.0	33.5	3	SN3T	
	NEW TM2SC 25W26-80-3L-ABUT	143	80	4.7	25	20.1	26.4	2	SA3T	
	NEW TM3SC 32W35-105-3L-ABUT	172	105		32	28	35.5	3	SA3T	

Thread Applications for 3/8" L Style Toolholders (Weldon Shank)



Toolholder	Min. Thread Ø			
	D2	Trapez	American ACME	Stub ACME
TM1SC 25W21-50-3L	21.6	(TR30-36)x6	1¼-5; 1⅜-4; 1½-4	1¼-5; 1⅜-4; 1½-4
TM2SC 25W28-70-3L	28.5	(TR38-44)x7	1¾-4	-
TM3SC 32W33-90-3L	33.5	(TR46-52)x8	2-4; 2¼-3; 2½-3; 2¾-3	2-4; 2¼-3; 2½-3; 2¾-3

Toolholder	Thread Ø	
	D2	American Buttress
TM2SC 25W26-80-3L-ABUT	26.4	(1.75"-4")-16; (1.75"-6")-12; (1.75"-6")-10; (1.75"-6")-8; (1.75"-6")-6
TM3SC 32W35-105-3L-ABUT	35.5	(2.5"-4")-16; (2.5"-6")-12; (2.5"-6")-10; (2.5"-6")-8; (2.5"-6")-6

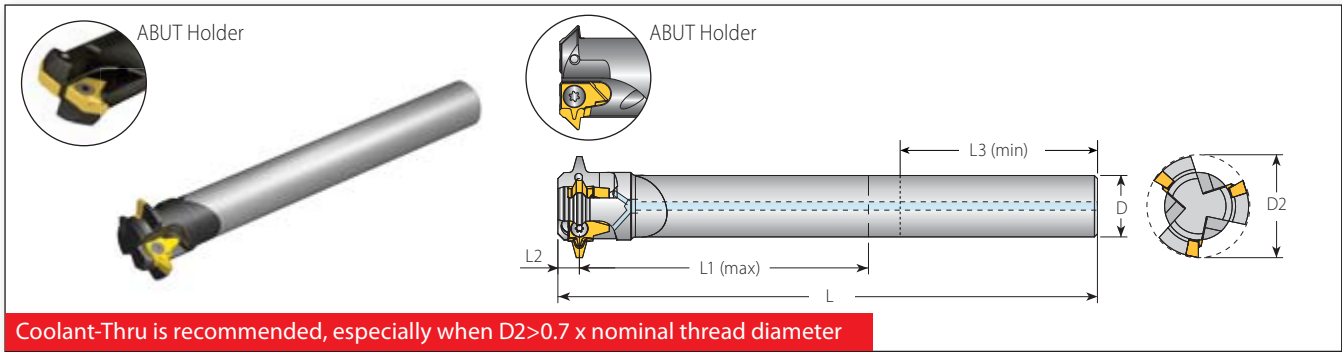Standard Toolholders - Carbide Cylindrical Shank (L Style - 3/8" L)



Carbide Cylindrical Shank for 3/8" L Style Inserts


Carbide Cylindrical Shank for 3/8" L Style Inserts									Spare Parts	
Insert Size	Ordering Code	Dimensions (mm)						No. of Flutes		
IC	Toolholder	L	L1(max)	L2	L3(min)	D	D2	Z	Insert Screw	Torx Key
3/8"L	CTM1SC 1/2"C21-75-3L	115	75		40	12.7	21.6	1	SN3T	HK3T
	CTM2SC 18C28-100-3L	155	100	7.0	46	18	28.5	2	SA3T	
	CTM3SC 20C33-120-3L	176	120		46	20	33.5	3	SN3T	
	NEW CTM2SC 20C26-105-3L-ABUT	172.5	105	4.7	40	20	26.4	2	SA3T	

Thread Applications for 3/8" L Style Toolholders (Carbide Cylindrical Shank)

Toolholder	Min. Thread Ø			
	D2	Trapez	American ACME	Stub ACME
CTM1SC 1/2"C21-75-3L	21.6	(TR30-36)x6	1 1/4-5; 1 3/8-4; 1 1/2-4	1 1/4-5; 1 3/8-4; 1 1/2-4
CTM2SC 18C28-100-3L	28.5	(TR38-44)x7	1 3/4-4	-
CTM3SC 20C33-120-3L	33.5	(TR46-52)x8	2-4; 2 1/4-3; 2 1/2-3; 2 3/4-3	2-4; 2 1/4-3; 2 1/2-3; 2 3/4-3

Toolholder	Thread Ø	
	D2	American Buttress
CTM2SC 20C26-105-3L-ABUT	26.4	(1.75"-4")-16; (1.75"-6")-12; (1.75"-6")-10; (1.75"-6")-8; (1.75"-6")-6

Shell Mill (L Style - 3/8" L)

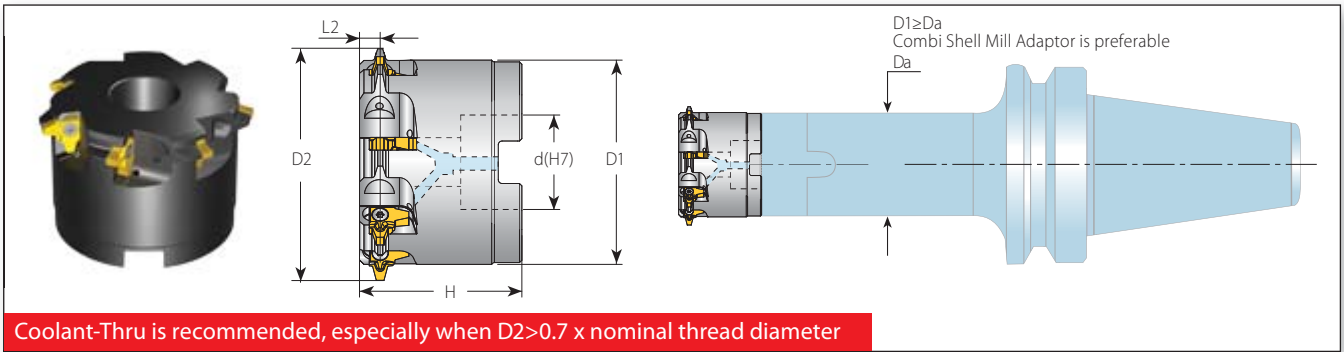

Shell Mill for 3/8" L Style Inserts


Insert Size	Ordering Code	Dimensions (mm)						No. of Flutes	Spare Parts			
		IC	Toolholder	D1	D2	d(H7)	H		L2	Z	Insert Screw	Torx Key
3/8"L	TM7SC D80-32-3L			69.2	80	32	55	7.0	7	SA3T	HK3T	M16x2.0x40
	NEW TM5SC D48-22-3L-ABUT			41	48	22	40	4.7	5			M10x1.50x35
	NEW TM6SC D58-27-3L-ABUT			51	58	27			6			M12x1.75x40

Thread Applications for 3/8" L Style Toolholders (Shell Mill)

Toolholder	Min. Thread Ø			
D2	Trapez	American ACME	Stub ACME	
TM7SC D80-32-3L	80	(TR115-130)x6; (TR175-240)x8	-	-

Toolholder	Thread Ø	
D2	American Buttress	
TM5SC D48-22-3L-ABUT	48	(3.0"-6")-12; (3.0"-6")-10; (3.0"-6")-8; (3.0"-6")-6
TM6SC D58-27-3L-ABUT	58	(4.0"-6")-12; (4.0"-6")-10; (4.0"-6")-8; (4.0"-6")-6

Shell Mill (5/8" V Style)

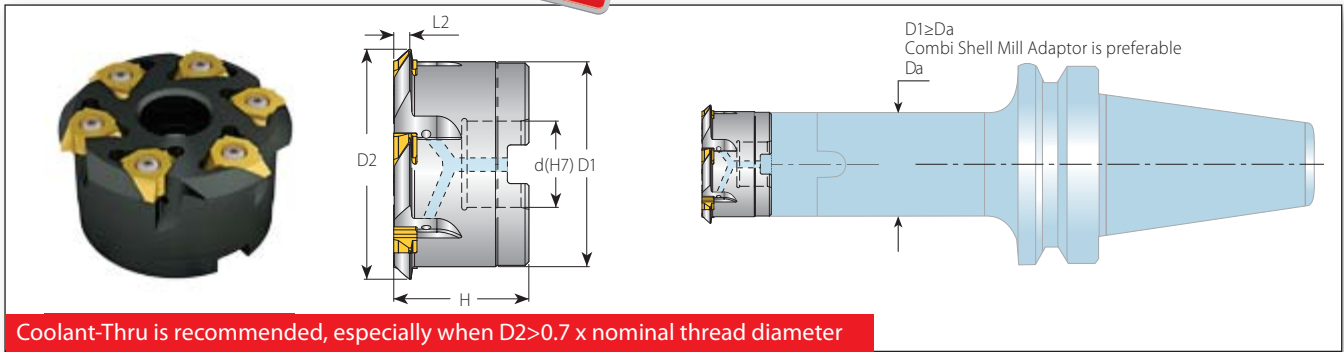

Coolant-Thru is recommended, especially when $D2 > 0.7 \times$ nominal thread diameter


Shell Mill for 5/8" V Style Inserts

Insert Size	Ordering Code	Dimensions (mm)						No. of Flutes	Insert	Spare Parts		
		D1	D2	d(H7)	H	L2	Z			Insert Screw	Torx Key	Holder Screw
5/8"V	NEW TM6SC D88-32-5V6-ABUT	72.5	88	32	47.9	5.35	6	5V14ABUT TM ...	SA5T	HK5T	M16x2.0x40	
	NEW TM6SC D88-32-5V8-ABUT	72.5	88	32	51.7	8.50		5V12.5ABUT TM ...				
					50.0	7.10	6	5V13ABUT TM ...				



Thread Applications for 5/8" V Style Toolholders (Shell Mill)

Toolholder	Thread Ø	
	D2	American Buttress
TM6SC D88-32-5V6-ABUT	88	(5.0"-24")-4
TM6SC D88-32-5V8-ABUT	88	(6.0"-24")-3; (7.0"-24")-2.5

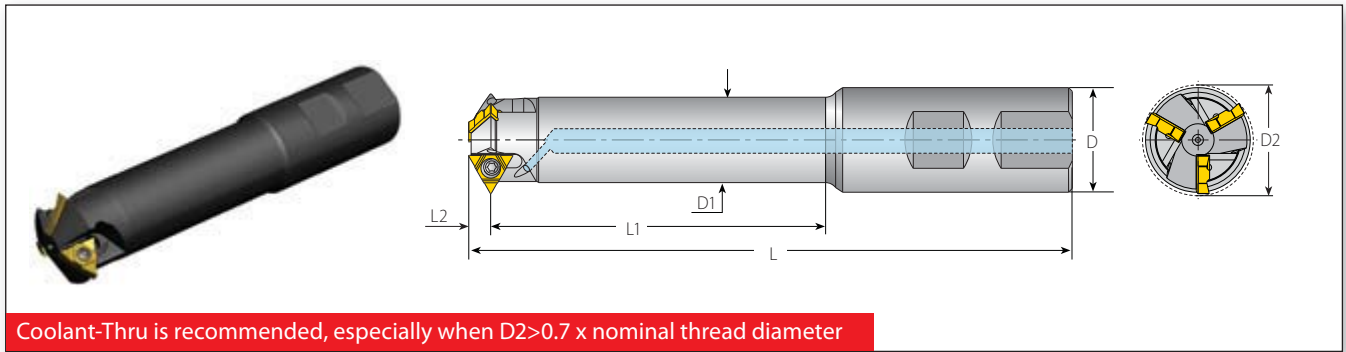Standard Toolholders - Weldon Shank (U Style)



Weldon Shank for U Style Inserts


Weldon Shank for U Style Inserts									Spare Parts	
Insert Size	Ordering Code	Dimensions (mm)						No. of Flutes		
IC		L	L1	L2	D	D1	D2	Z	Insert Screw	Torx Key
1/4"U	TM1SC 16W15-40-2U	95	40		16	11	14.75*	1	SN2T	HK2T
	TM2SC 25W21-60-2U	123	60		25	16	20.65*	2		
	TM2SC 25W23-70-2U	135	70	5.4	25	17.7	23	2		
	TM3SC 25W26-80-2U	147	80		25	20.4	26	3		
3/8"U	TM4SC 32W31-95-2U	164	95		32	25.7	31	4	SA3T	HK3T
	TM3SC 32W36-95-3U	166	95		32	29	36.5	3		
	TM3SC 32W36-145-3U	225	145	8.0	32	28	36.5	3		
	TM4SC 40W42-120-3U	201	120		40	34.2	42	4	SN3T	

Thread Application for U Style Toolholders (Weldon Shank)

Toolholder	Min. Thread Ø							
	D2	ISO Coarse	ISO Fine	UNC	UN/UNF/UNEF/UNS	BSP (G)	Partial 55°	Trapez
TM1SC 16W15-40-2U	14.75*	M18x2.5, M24x3.0	M16x0.5, M16x0.75, M16x1.0, M17x1.25, M17x1.5, M17x2.0	¾-10	⅝-32UN, ⅝-28UN, ⅝-27UNS, 11/16-24UN, 11/16-20UN, 11/16-16UN, ¾-14UNS, ¾-12UN	⅝-19, ½-14, 1-11	11/16-14; ¾-12; ⅝-11; ¾-10; ⅝-9; 1-8; 1 1/8-7	TR22x3, TR24x3
TM2SC 25W21-60-2U	20.65*	M24x3.0, M30x3.5	M22x0.5, M22x0.75, M22x1.0, M23x1.25, M23x1.5, M23x2.0	1-8, 1 1/8-7, 1 3/8-6	⅝-32UN, ⅝-28UN, ⅝-27UNS, ⅝-24UNS, ⅝-20UNEF, 1-18UNS, 1 5/16-16UN, 1-14UNS, 1 5/16-12UN, 1-10UNS	¾-14, 1-11	1-26, 1-20, 1-16, 1-12, 1-10, 1 1/8-9, 1-8, 1 1/8-7	TR26-TR60x3
TM2SC 25W23-70-2U	23	M27x3.0, M30x3.5, M36x4.0	M24x0.5, M24x0.75, M25x1.0, M25x1.25, M26x1.5, M26x2.0, M27x2.5	1 1/8-7	1-32UN, 1-28UN, 1-27UNS, 1-24UNS, 1-20UNEF, 1-18UNS, 1-16UN, 1-14UNS, 1-12UNF, 1 1/8-10UNS, 1 1/8-8UN	¾-14, 1-11	1-26, 1-20, 1-16, 1 1/8-12, 1 1/8-9, 1 1/8-7	-
TM3SC 25W26-80-2U	26	M30x3.5, M36x4.0	M27x0.5, M27x0.75, M28x1.0, M28x1.25, M28x1.5, M29x2.0, M30x2.5, M30x3.0	1 1/4-7, 1 3/8-6	1 1/8-28UN, 1 1/8-24UNS, 1 1/8-20UN, 1 1/8-18UNEF, 1 1/8-16UN, 1 1/8-14UNS, 1 1/8-12UNF, 1 1/4-10UNS, 1 3/8-8UN	⅝-14, 1-11	1 1/8-26, 1 1/8-20, 1 3/8-16, 1 3/8-12, 1 3/8-8, 1 1/4-7	-
TM4SC 32W31-95-2U	31	M36x4.0	M32x0.5, M32x0.75, M33x1.0, M33x1.25, M33x1.5, M34x2.0, M34x2.5, M35x3.0, M36x3.5	1 1/2-6	1 1/16-28UN, 1 3/8-24UNS, 1 5/16-20UN, 1 5/16-18UNEF, 1 5/16-16UN, 1 3/8-14UNS, 1 3/8-12UNF, 1 3/8-10UNS, 1 3/8-8UN	1 1/8-11	1 3/8-26, 1 3/8-20, 1 3/8-16, 1 3/8-12, 1 1/8-8	-
TM3SC 32W36-95-3U TM3SC 32W36-145-3U	36.5	M42x4.5, M48x5.0, M56x5.5, M64x6.0	M39x1.5, M39x2.0, M40x2.5, M41x3.0, M42x3.5, M42x4.0	1 3/4-5, 2-4.5, 2 1/2-4	1 1/16-16UN, 1 1/8-14UNS, 1 1/16-12UN, 1 1/8-10UNS, 1 1/8-8UN, 1 1/8-6UN	1 1/4-11	1 1/8-16, 1 1/8-12, 1 1/8-8, 1 1/8-6, 1 1/4-5	-
TM4SC 40W42-120-3U	42	M48x5.0, M56x5.5, M64x6.0	M45x1.5, M45x2.0, M46x2.5, M48x3.0, M48x3.5, M48x4.0	2-4.5, 2 1/2-4	1 3/4-16UN, 1 3/4-14UNS, 1 13/16-12UN, 1 13/16-8UN, 1 13/16-6UN	1 1/2-11	1 1/8-16, 1 1/8-12, 1 1/8-8, 2 1/4-6, 2-4.5	-

* For TR inserts use the CNC program (D2+0.25mm)

Standard Toolholders - Carbide Cylindrical Shank (U Style)

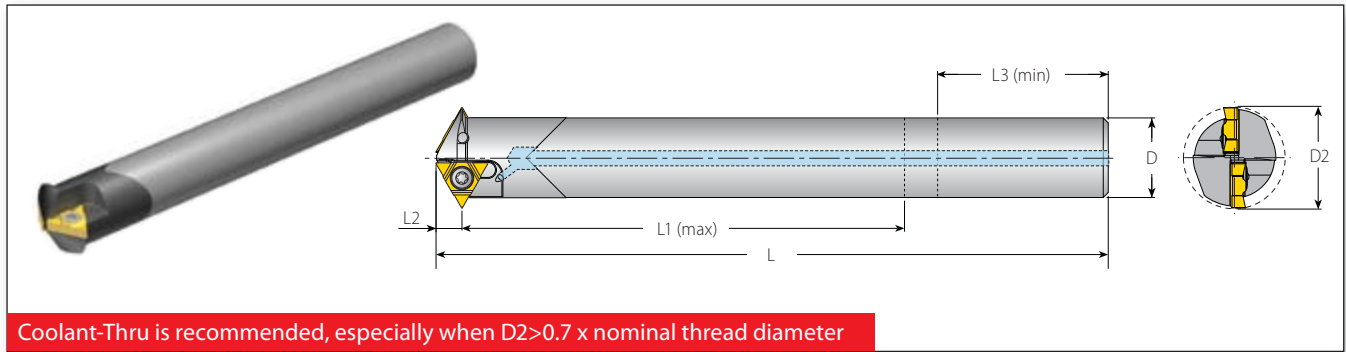

Carbide Cylindrical Shank for U Style Inserts


Insert Size	Ordering Code	Dimensions (mm)							No. of Flutes	Spare Parts	
		L	L1 (max)	L2	L3 (min)	D	D2	Z		Insert Screw	Torx Key
1/4"U	CTM1SC 08C15-40-2U	109	40	5.4	18	8	14.75*	1	SN2T	HK2T	
	CTM1SC 11C15-60-2U	120	60		25	10.7	14.75*	1			
	CTM2SC 14C17-65-2U**	132	65	3.4	30	14	17.2**	2			
	CTM2SC 14C21-65-2U	136	65		30	14	20.65*	2			
	CTM2SC 16C21-80-2U	135	80	5.4	34	16	20.65*	2			
	CTM3SC 20C26-110-2U	165	110		40	20	26.0*	3			
	CTM4SC 25C31-135-2U	186	135		46	25	31.0*	4			

Thread Applications for U Style Toolholders (Carbide Cylindrical Shank)

Toolholder	Min. Thread Ø							
	D2	ISO Coarse	ISO Fine	UNC	UN/UNF/UNEF/UNS	BSP (G)	Partial 55°	Trapez
CTM1SC 08C15-40-2U	14.75*	M18x2.5, M24x3.0, M30x3.5, M36x4.0	M16x0.5, M16x0.75, M16x1.0, M17x1.25, M17x1.5, M17x2.0	¾-10, ⅞-9, 1-8, 1 ⅛-7, 1 ⅜-6	⅝-32UN, ⅝-28UN, ⅝-27UNS, 1 ⅛-24UNEF, 1 ⅛-20UN, 1 ⅛-16UN, ¾-14UNS, 1 ⅛-12UN	½-14, 1-11	1 ⅛-26, 1 ⅛-20, 1 ⅛-16, 1 ⅛-14, ¾-12, ⅞-11, ¾-10, ⅞-9, 1-8, 1 ⅛-7	TR22x3, TR24x3, TR20x4, TR22x5, TR24x5, TR26x5, TR28x5
CTM1SC 11C15-60-2U	14.75*	M18x2.5, M24x3.0	M16x0.5, M16x0.75, M16x1.0, M17x1.25, M17x1.5, M17x2.0	¾-10, ⅞-9, 1-8	⅝-32UN, ⅝-28UN, ⅝-27UNS, 1 ⅛-24UNEF, 1 ⅛-20UN, 1 ⅛-16UN, ¾-14UNS, 1 ⅛-12UN	½-14, 1-11	1 ⅛-26, 1 ⅛-20, 1 ⅛-16, 1 ⅛-14, ¾-12, ⅞-11, ¾-10, ⅞-9	TR22x3, TR24x3
CTM2SC 14C17-65-2U	17.2**	M20x2.5, M22x2.5	M21x2.0	⅞-9	⅞-10UNS; 1 ⅛-12UN	-	-	-
CTM2SC 14C21-65-2U	20.65*	M24x3.0, M30x3.5, M36x4.0	M22x0.5, M22x0.75, M22x1.0, M23x1.25, M23x1.5, M23x2.0	1-8, 1 ⅛-7, 1 ⅜-6	⅞-32UN, ⅞-28UN, ⅞-27UNS, ⅞-24UNS, ⅞-20UNEF, 1-18UNS, 1 ⅛-16UN, 1-14UNS, 1 ⅛-12UN, 1-10UNS	¾-14, 1-11	1-26, 1-20, 1-16, 1-12, 1-10, 1 ⅛-9, 1-8, 1 ⅛-7	(TR26-TR60)x3, TR28x4, (TR65-TR110)x4, TR28x5
CTM2SC 16C21-80-2U	20.65*	M24x3.0, M30x3.5	M22x0.5, M22x0.75, M22x1.0, M23x1.25, M23x1.5, M23x2.0	1-8, 1 ⅛-7, 1 ⅜-6	⅞-32UN, ⅞-28UN, ⅞-27UNS, ⅞-24UNS, ⅞-20UNEF, 1-18UNS, 1 ⅛-16UN, 1-14UNS, 1 ⅛-12UN, 1-10UNS	¾-14, 1-11	1-26, 1-20, 1-16, 1-12, 1-10, 1 ⅛-9, 1-8, 1 ⅛-7	(TR26-TR60)x3
CTM3SC 20C26-110-2U	26	M30x3.5, M36x4.0	M27x0.5, M27x0.75, M28x1.0, M28x1.25, M28x1.5, M29x2.0, M30x2.5, M30x3.0	1 ¼-7, 1 ⅜-6	1 ⅛-28UN, 1 ⅛-24UNS, 1 ⅛-20UN, 1 ⅛-18UNEF, 1 ⅛-16UN, 1 ⅛-14UNS, 1 ⅛-12UNF, 1 ⅛-10UNS, 1 ⅜-8UN	⅞-14, 1-11	1 ⅛-26, 1 ⅛-20, 1 ⅜-16, 1 ⅜-12, 1 ⅜-8, 1 ¼-7	(TR40-TR60)x3 (TR65-TR110)x4
CTM4SC 25C31-135-2U	31	M36x4.0	M32x0.5, M32x0.75, M33x1.0, M33x1.25, M33x1.5, M34x2.0, M34x2.5, M35x3.0, M36x3.5	1 ½-6	1 ⅛-28UN, 1 ½-24UNS, 1 ½-20UN, 1 ½-18UNEF, 1 ⅜-16UN, 1 ⅜-14UNS, 1 ⅜-12UNF, 1 ⅜-10UNS, 1 ⅜-8UN	1 ⅛-11	1 ⅜-26, 1 ⅜-20, 1 ⅜-16, 1 ⅜-12, 1 ⅜-8	(TR50-TR60)x3 (TR65-TR110)x4

* For TR inserts use the CNC program (D2+0.25mm)
 ** To be used only with inserts 2UIDD60TM... or 2UIDM60TM...
 For insert 2UIDD60 TM... use the CNC program (D2+0.7mm)

Standard Toolholders - Steel Cylindrical Shank (U Style)

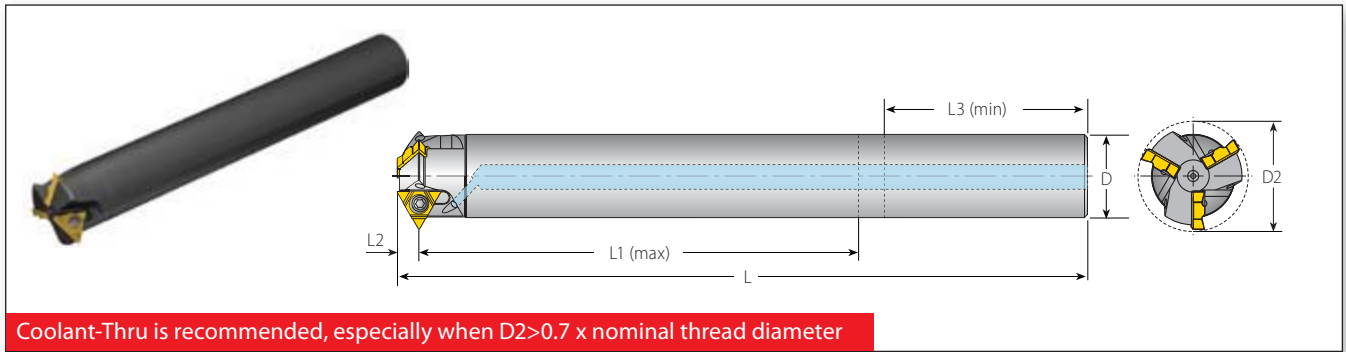


Steel Cylindrical Shank for U Style Inserts


Steel Cylindrical Shank for U Style Inserts									Spare Parts	
Insert Size	Ordering Code	Dimensions (mm)				No. of Flutes			Insert Screw	Torx Key
IC		L	L1 (max)	L2	L3 (min)	D	D2	Z		
1/4"U	TM2SC 18C23-86-2U	166	86	5.4	40	18	23.3	2	SN2T	HK2T
	TM3SC 20C26-105-2U	186	105		40	20	26	3		
	TM4SC 25C31-115-2U	196	115		46	25	31	4		
3/8"U	TM3SC 25C36-125-3U	193	125	8.0	46	25	36.5	3	SA3T	HK3T
	TM3SC 28C36-144-3U	222	144		60	28	36.5	3		

Thread Application for U Style Toolholders (Steel Cylindrical Shank)

Toolholder	Min. Thread Ø						
	D2	ISO Coarse	ISO Fine	UNC	UN/UNF/UNEF/UNS	BSP (G)	Partial 55°
TM2SC 18C23-86-2U	23.3	M27x3.0, M30x3.5, M36x4.0	M24x0.5, M25x0.75, M25x1.0, M25x1.25, M26x1.5, M26x2.0, M27x2.5	1½-7	1-32UN, 1-28UN, 1-27UN, 1-24UNS, 1-20UNEF, 1-18UNS, 1-16UN, 1-14UNS, 1½-12UN, 1½-10UNS, 1½-8UN	¾-14, 1-11	1-26, 1-20, 1½-16, 1½-12, 1½-9, 1½-7
TM3SC 20C26-105-2U	26	M30x3.5, M36x4.0	M27x0.5, M27x0.75, M28x1.0, M28x1.25, M28x1.5, M29x2.0, M30x2.5, M30x3.0	1¼-7, 1¾-6	1½-28UN, 1½-24UNS, 1½-20UN, 1½-18UNEF, 1½-16UN, 1½-14UNS, 1½-12UNF, 1¾-10UNS, 1¾-8UN	7/8-14, 1-11	1½-26, 1½-20, 1¾-16, 1¾-12, 1¾-8, 1¼-7
TM4SC 25C31-115-2U	31	M36x4.0	M32x0.5, M32x0.75, M33x1.0, M33x1.25, M33x1.5, M34x2.0, M34x2.5, M35x3.0, M36x3.5	1½-6	1½-28UN, 1½-24UNS, 1½-20UN, 1½-18UNEF, 1¾-16UN, 1¾-14UNS, 1¾-12UNF, 1¾-10UNS, 1¾-8UN	1½-11	1¾-26, 1¾-20, 1¾-16, 1¾-12, 1¾-8
TM3SC 25C36-125-3U TM3SC 28C36-144-3U	36.5	M42.5x4.5, M48x5.0, M56x5.5, M64x6.0	M39x1.5, M40x2.5, M41x3.0, M42x3.5, M42x4.0	1¾-5, 2-4.5, 2½-4	1½-16UN, 1½-14UNS, 1½-12UN, 1¾-10UNS, 1¾-8UN, 1¾-6UN	1¼-11	1¾-16, 1½-12, 1¾-8, 1¾-6, 1¾-5

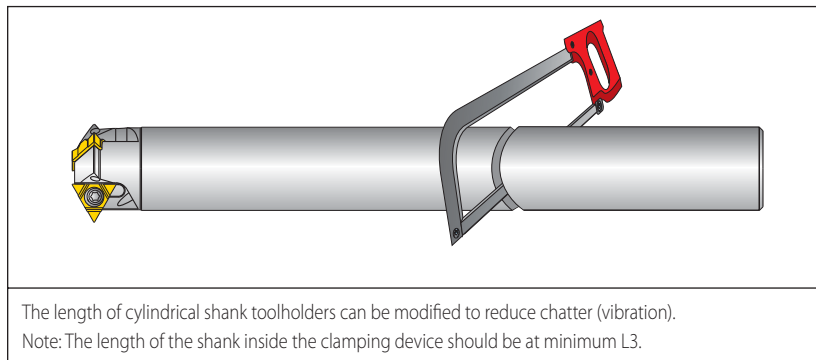

Shell Mill (U Style)

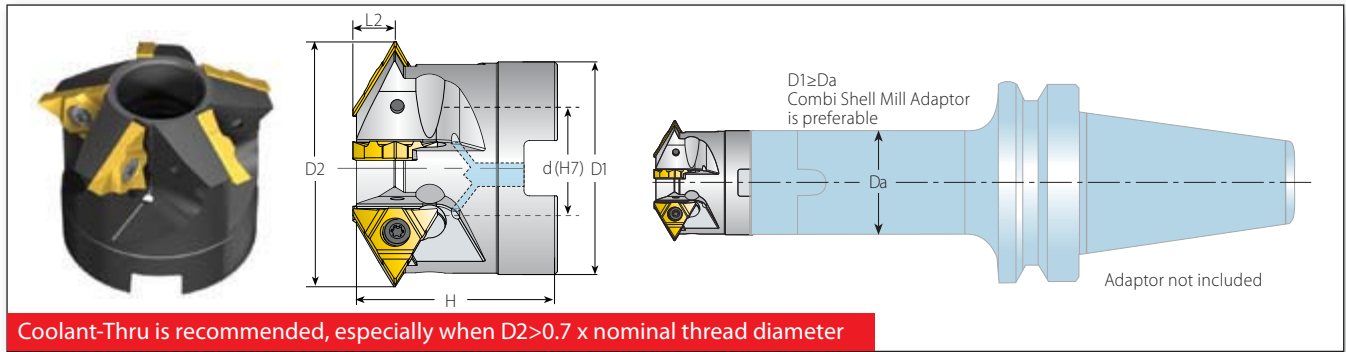


Shell Mill for U Style Inserts

Insert Size	Ordering Code	Dimensions (mm)						No. of Flutes	Spare Parts			
		D1	D2	d(H7)	H	L2	Z		Insert Screw	Torx Key	Holder Screw	Holder Screwdriver
3/8"U	TM4SC D42-16-3U	34	42	16	40	8.0	4	SN3T	HK3T	SA5T-C5 (M8x1.25x28)	TK5T	
	TM5SC D48-22-3U	40	48	22	40	8.0	5			M10x1.50x35	-	
	TM6SC D56-22-3U	48	56	22	40	8.0	6			M12x1.75x40	-	
1/2"U	TM6SC D88-27-4U	76	88	27	50	10.8	6	SA4T	HK4T	M12x1.75x40	-	
	TM7SC D98-32-4U	85	98	32	55	10.8	7			M16x2.0x40	-	

Thread Application for U Style Shell Mill

Toolholder	Min. Thread Ø						
	D2	ISO Coarse	ISO Fine	UNC	UN/UNF/UNEF/UNS	BSP (G)	Partial 55°
TM4SC D42-16-3U	42	M48x5.0, M56x5.5, M64x6.0,	M45x1.5, M45x2.0, M46x2.5, M48x3.0, M48x3.5, M48x4.0	2-4.5, 2½ - 4	1¾-16UN, 1¾-14UNS, 1½-12UN, 1½-8UN, 1½-6UN	1½ - 11	1⅞-16, 1⅞-12, 1⅞-8, 1⅞-6, 2-4.5
TM5SC D48-22-3U	48	M56x5.5, M64x6.0	M52x1.5, M52x2.0, M52x2.5, M52x3.0, M55x4.0	2¼ - 4.5, 2½ - 4	2-16UN, 2-14UN, 2-12UN, 2¼-10UNS, 2¼-8UN, 2¼-6UN	1¾ - 11	2-16, 2¼-12, 2¼-8, 2¼-6, 3-5, 3½-4.5, 2¼-4
TM6SC D56-22-3U	56	M64x6.0	M60x1.5, M60x2.0, M60x2.5, M60x3.0, M64x4.0	2½ - 4	2⅝-16UN, 2⅝-14UN, 2⅝-12UN, 2½-10UNS, 2⅝-8UN, 2½-6UN	2 - 11	2½-16, 2½-12, 2½-8, 2¼-6, 3-5, 3½-4.5, 4¼-4
TM6SC D88-27-4U	88	-	M95x6.0, M125x8	4 - 4	4¼-4UN	-	4-3, 4¼-4
TM7SC D98-32-4U	98	-	M105x6.0, M125x8	-	4¼-4UN	-	4¼-4

Standard Toolholders - Steel Cylindrical Shank (A Style)

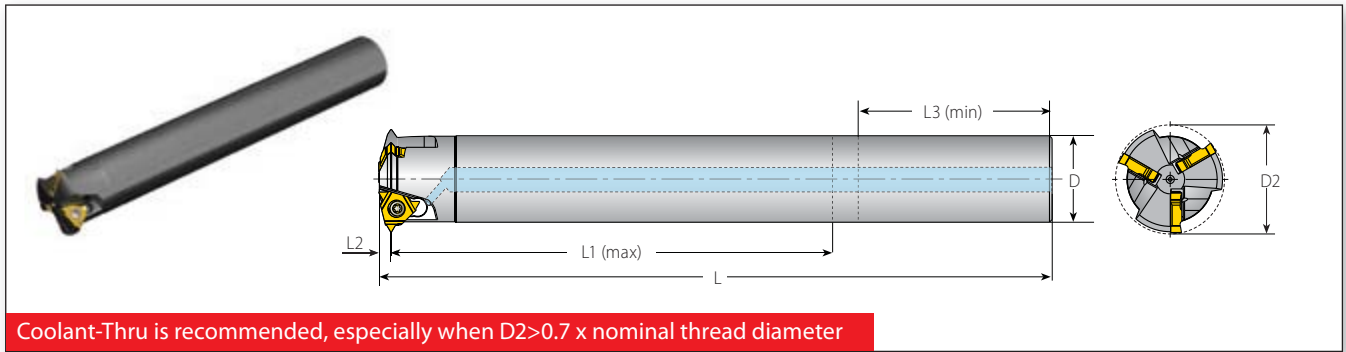


Steel Cylindrical Shank for A-Style Inserts

Insert Size	Ordering Code	Dimensions (mm)							No. of Flutes	Spare Parts	
		L	L1 (max)	L2	L3 (min)	D	D2	Z		Insert Screw	Torx Key
1/4"A	TM3SC 20C26-105-2A	184	105	3.0	40	20	26	3	SN2T	HK2T	
3/8"A	TM3SC 28C35-144-3A	218	144	4.0	46	28	35.3	3	SA3T	HK3T	

Thread Application for A-Style Toolholders (Steel Cylindrical Shank)

Toolholder	D2	Min. Thread Ø				
		ISO Coarse	ISO Fine	UNC	UN/UNF/UNEF/UNS	BSP (G)
TM3SC 20C26-105-2A	26	-	M28x1.5, M29x2.0, M30x2.5, M30x3.0	-	1½-16UN, 1½-14UNS, 1¾-12UN, 1¼-10UNS, 1¾-8UN	-
TM3SC 28C35-144-3A	35.3	-	M38x2.0, M39x2.5, M39x3.0, M40x4.0	-	1¾-12UN, 1¾-10UNS, 1¾-8UN, 1¾-6UN	-

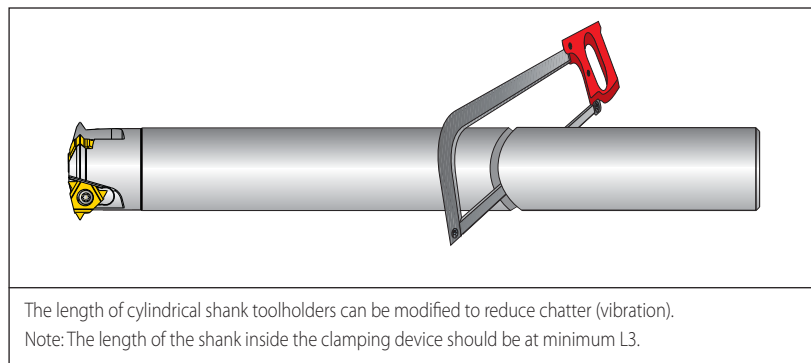

Recommended Grades, Cutting Speeds Vc [m/min] and Feed f [mm/tooth]

Material Group	Vardex No.	Material	Hardness Brinell HB	Vc [m/min]		Feed* f [mm/tooth] by Cutting Dia. (D2)			
				VBX	VTX	13-23	24-42	Shell Mill	
P Steel	1	Unalloyed steel	Low carbon (C=0.1-0.25%)	125	100-210	90-180	0.20-0.32	0.30-0.50	0.30-0.75
	2		Medium carbon (C=0.25-0.55%)	150	100-180	90-170	0.20-0.32	0.30-0.50	0.30-0.75
	3		High Carbon (C=0.55-0.85%)	170	100-170	90-160	0.15-0.23	0.25-0.35	0.25-0.52
	4	Low alloy steel (alloying elements ≤5%)	Non hardened	180	60-90	90-155	0.17-0.28	0.28-0.45	0.28-0.67
	5		Hardened	275	80-150	80-160	0.15-0.28	0.25-0.45	0.25-0.67
	6		Hardened	350	70-140	70-150	0.15-0.25	0.25-0.40	0.25-0.60
	7	High alloy steel (alloying elements >5%)	Annealed	200	60-130	70-115	0.15-0.22	0.20-0.30	0.20-0.45
	8		Hardened	325	70-110	60-100	0.13-0.21	0.18-0.30	0.18-0.45
	9	Cast steel	Low alloy (alloying elements <5%)	200	100-170	100-170	0.15-0.22	0.20-0.30	0.20-0.45
	10		High alloy (alloying elements >5%)	225	70-120	70-130	0.12-0.22	0.17-0.30	0.17-0.45
M Stainless Steel	11	Stainless steel Ferritic	Non hardened	200	100-170	120-180	0.15-0.22	0.22-0.34	0.22-0.50
	12		Hardened	330	100-170	120-180	0.16-0.23	0.21-0.32	0.21-0.48
	13	Stainless steel Austenitic	Austenitic	180	70-140	100-140	0.15-0.25	0.25-0.40	0.25-0.60
	14		Super Austenitic	200	70-140	100-140	0.12-0.20	0.17-0.26	0.17-0.39
	15	Stainless steel Cast Ferritic	Non hardened	200	70-140	100-140	0.16-0.24	0.25-0.37	0.25-0.55
	16		Hardened	330	70-140	100-140	0.12-0.20	0.17-0.26	0.17-0.39
	17	Stainless steel Cast austenitic	Austenitic	200	70-120	100-120	0.15-0.22	0.20-0.30	0.20-0.45
	18		Hardened	330	70-120	100-120	0.12-0.20	0.17-0.26	0.17-0.39
K Cast Iron	28	Malleable Cast iron	Ferritic (short chips)	130	60-130	100-120	0.16-0.24	0.25-0.37	0.25-0.55
	29		Pearlitic (long chips)	230	60-120	80-100	0.15-0.22	0.20-0.30	0.20-0.45
	30	Grey cast iron	Low tensile strength	180	60-130	80-100	0.15-0.22	0.22-0.34	0.22-0.50
	31		High tensile strength	260	60-100	80-100	0.15-0.22	0.20-0.30	0.20-0.45
	32	Nodular SG iron	Ferritic	160	60-125	80-100	0.10-0.20	0.15-0.25	0.15-0.37
	33		Pearlitic	260	50-90	60-90	0.15-0.22	0.20-0.30	0.20-0.45
N(K) Non-Ferrous Metals	34	Aluminium alloys Wrought	Non aging	60	100-250		0.30-0.50	0.60-1.00	0.60-1.50
	35		Aged	100	100-180		0.28-0.50	0.50-0.90	0.50-1.20
	36	Aluminium alloys Cast	Cast	75	150-400		0.28-0.50	0.50-0.90	0.50-1.20
	37		Cast & aged	90	150-280		0.25-0.40	0.40-0.60	0.40-0.90
	38	Aluminium alloys Cast Si 13-22%	130	80-150		0.28-0.50	0.50-0.90	0.50-1.20	
	39	Copper and Copper alloys	Brass	90	120-210	100-200	0.30-0.50	0.60-1.00	0.60-1.50
	40		Bronze and non leaded copper	100	120-210	100-200	0.28-0.50	0.50-0.90	0.50-1.20
S(M) Heat Resistant Material	19	High temperature alloys	Annealed (Iron based)	200	20-45	20-40	0.09-0.15	0.12-0.22	0.12-0.33
	20		Aged (Iron based)	280	20-30	20-30	0.07-0.13	0.10-0.20	0.10-0.30
	21		Annealed (Nickel or Cobalt based)	250	15-20	15-20	0.08-0.15	0.08-0.20	0.08-0.30
	22		Aged (Nickel or Cobalt based)	350	10-15	10-15	0.08-0.15	0.08-0.20	0.08-0.30
	23	Titanium alloys	Pure 99.5 Ti	400Rm	70-140	70-120	0.07-0.13	0.10-0.20	0.10-0.30
	24		α+β alloys	1050Rm	20-50	20-50	0.07-0.13	0.10-0.20	0.10-0.30
H(K) Hardened Material	25	Extra hard steel	Hardened & tempered	45-50HRC	15-45	15-45	0.05-0.12	0.05-0.18	0.05-0.27
	26			51-55HRC	15-40	15-40	0.05-0.12	0.05-0.18	0.05-0.27

* When using a Shell Mill toolholder, the feed can be increased by 50%

* For 3/8" L it is recommended to machine in two passes and decrease the feed by 40%

Grades

Grade	Application
VBX	TiCN coated carbide grade. Excellent grade for Steels and General Use.
VTX	TiAlN coated carbide grade. Ideal for Stainless Steels.

U Style



A Style



Mini-L Style



3/8" L Style



Vertical Style



V Style





VARGUS
GEN

Tool Selection and
CNC Program Generator



The most popular and advanced thread turning and thread milling software on the market today.

Now available in 2 Versions at www.vargus.com:

- Online Version
- Downloadable Version
- Online interactive software
- Standalone software application
- For all web browsing environments
- MS Windows OS-based program
- Most updated version always online
- Automatic updates



TMSD



Thread Mill for Deep Holes

VARDEx

Advanced Threading Solutions



Visit VARGUS